



2nd International Conference on Intelligent Computing, Communication & Convergence
(ICCC-2016)

Srikanta Patnaik, Editor in Chief

Conference Organized by Interscience Institute of Management and Technology

Bhubaneswar, Odisha, India

Dynamic Improved Path Planning for Mobile Beacon in Wireless Sensor Network

Jebachristy A^{a*}, Thilagavathi P^b, J Martin Leo Manickam^c, Anita X^d

^{a*}Final ME Student, Department of Information Technology, Jerusalem College of Engineering, Chennai 600100, India

^bSr. Assistant Professor, Department of Information Technology, Jerusalem College of Engineering, Chennai 600100, India

^cProfessor, Department of Electronics Communication Engineering, St. Joseph's College of Engineering, Chennai 600119, India

^dAssociate Professor, Department of Information Technology, Jerusalem College of Engineering, Chennai 600100, India

Abstract

The main intention of wireless sensor network is to provide the information about the spatiotemporal characteristics of the observed physical world. In many wireless sensor network applications, namely forest fire detection, animal tracking etc., it is important to locate the sensor with accuracy. Locating the sensors after they have deployed is termed as localization. Most of the localization algorithm relies on the availability of reasonably accurate location information. This is valid only in few networks which has location sensing devices, such as GPS receivers are available at all nodes. In real time, equipping GPS with all sensor nodes are rare due to its cost, power. To overcome these limitations various path have been proposed to derive approximated locations of all nodes using the mobile beacon. In existing systems, Localization techniques that are proposed for sensor nodes are calculated by receiving the mobile beacon signal with their coordinates by incorporating the various path planning scheme like SCAN, DOUBLE SCAN, HILBERT and Z curve for trajectory of mobile beacon. Those path planning strategies resulting in existence of collinear problem and localization error of nodes. In this paper, a novel Tree - Climbing path planning mechanism is proposed. The proposed path ensures to overcome collinear problem by travelling in a tree based path. The performance of a novel tree climbing is analysed using the NS2 simulator.

© 2016 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the Organizing Committee of ICCC 2016

Keywords: Localization, Mobile Beacon, Path Planning, Sensor Nodes, Wireless Sensor Networks

*Jebachristy A, Thilagavathi P, J Martin Leo Manickam, Anita X, Tel.: *+919840440357.

E-mail addresses: jebachristy_it@yahoo.co.in

1. Introduction

In most of the wireless sensor networks (WSN) comprises of many low cost sensor nodes that has been widely used in a various application like environmental monitoring, forest fire detection, battle field surveillance, and health monitoring. For example, the nodes that are deployed in the sensor network has to monitor fires and should locate the fire with some accuracy to enable the fire-fighter to act in response. Thus sensor information in many application is associated with the location where the information with locations are sensed. The data transmission of the sensor network is more efficient, if the location of the sensor nodes are more accurate. The trajectory of mobile beacon is an important research issue that are designed to minimize the energy cost in the localization and maximize the location accuracy for sensor networks. The main objective is to design a path to guide the mobile beacon to travel in a trajectory which can be used to localize other sensor nodes. The problem of finding a best trajectory for a mobile beacon was discussed with important observation that a node is localized if beacon trajectory is close to that node, and if a beacon travels in a straight line it is difficult to determine in which side of the line the node lies, so it result in localization error. Localization is one of the major issue in WSN to determine the physical location of unknown nodes in the field. So, it is necessary to place sensors equipped with Global Positioning System (GPS). However for a larger network, placing sensors with Global Positioning System (GPS) is cost effective. Many of the proposed methods used various techniques to locate the nodes in which only a limited sensor nodes equipped with GPS allow to move throughout the sensor network area with their knowing coordinates. This kind of node is called as mobile beacon. These nodes transmit their position information to help other nodes to localize themselves. In this paper, we consider a novel Tree Climbing path of a mobile beacon to ensure the shortest path. The proposed trajectory can achieve a good trade-off between range and path length. The performance of the proposed trajectory estimates by a series of simulation using ns-2 simulator.

2. Literature Survey

Many research has been done on localization for wireless sensor networks over last period. To estimate their position, the nodes with unknown coordinates are helped by one or more nodes with known coordinates. The static sensor with one mobile beacon is used to localize the set of static sensors. The different types of predefined static paths such as SCAN, DOUBLE SCAN, HILBERT, CIRCLE, S-Curve Z-Curve, in relation to localization are proposed. The main goal of developing a trajectory for a Mobile Beacon (MB) is to find shortest path to reach target node. Some mobile beacon path has been proposed in [1, 2, 3]. A brief study is done on the existing mobile beacon trajectories for localization in wide sensor networks. The three well known trajectories are proposed in [1] for the mobile beacon assisted localization are Scan, Double Scan and Hilbert space filling curve. All these trajectories attains exact location estimation compare to Random Way Point (RWP). These trajectories covers the complete network field. The location accuracy is calculated based on the distance between two successive beacon positions. In SCAN, the mobile beacon travels along x-axis and y-axis and covers all nodes in the deployed area. The distance between the two parallel y-axis of the mobile trajectory defines the resolution [1]. However, it suffers from collinear problem i.e. beacon messages transmit the signal when it travel along a straight line. The second proposed trajectory is DOUBLE SCAN, mobile anchor node traverse in both direction i.e. along x-axis and y-axis with double the distance for the same resolution in the sensing field. Existence of collinear problem still persist in DOUBLE SCAN. In HILBERT curve, the mobile beacon takes many turns traverse along the trajectory in such a way that the sensor nodes can receive three non-collinear beacon message without increasing path length. The main disadvantage is that this trajectory will never move on the border of the sensing field, and its location is not accurate. Further, two static path planning were proposed in [3] by Huang and Zaruba are CIRCLES and S-CURVES. This static path planning are introduced to reduce the straight lines trajectory for a mobile beacon to localize in WSN. In CIRCLES, the mobile anchor moves in a sequence of concentric circles. Since the deployed area is a square, it uncovers the four corners. The four corners of the square are covered by increasing the path length of the circle, which in

turn reduces localization accuracy. In S-CURVES, the mobile beacon moves from left to right with short straight lines. A spiral trajectory proposed in [6]. This trajectory takes long path length to solve the collinear problem and localization accuracy.

3. Proposed System

The proposed mechanism uses tree climbing trajectory as shown in the Figure.1. The main aim for tree climbing trajectory is to overcome three major problems. First, to avoid straight line travelling of mobile beacon.




Figure 1: Tree Climbing


Second, it is applicable to any deployment area. Third, only few nodes are assigned as mobile beacon to travel in deployed area. The mobile beacon that travel in deployed area is a dynamic path that moves by priority of neighbouring nodes.

3.1 Determining the path for mobile beacon

To determine the dynamic path of mobile beacon, the mobile beacon has to be allowed to move along the deployment area. Mobile beacon starts its original path from the unknown node called as source node. If a mobile beacon moves on a tree based dynamic path, there is a chance that many unknown sensors can get localized more accurately while the trajectory is maintained throughout the deployed area. The movement of mobile beacon from one node to other is based on single hop or multi hop. The shortest path will be selected by the mobile beacon to convey more beacon message to the unknown sensors in the area by using the tree climbing trajectory. It uses basically SMA* algorithm by making use of all available memory to carry out the search of destination node. It uses tree based path from the root node at the level one ($l=1$), followed by the nodes in the next level with the distance between the initial node to other nodes and distance from any node to goal node. Path planning is done when you add the target node to the closed list. The slight modification is done on SMA* and named as MSMA* (Modified SMA*) by creating two different queue namely Q1 (open) and Q2 (closed). Q1 contains all the nodes and the best nodes from Q1 is added to Q2 and repeat the same until the target node is reached. For each successor do the same, if it is not in both queue (Q1 and Q2) evaluate it and add to open and record its parent. Or else if the new path is better than previous one and record its parent. If it is not in open list, add it to open or adjust its priority in the Q1.

4. Performance Evaluation Grap The simulation are performed using NS2 simulator. The deployment area is set to be 100m * 100m. The unknown nodes in the deployed area is 50, are static and an anchor node that travel along tree based path. The below graph depicts, the path length versus range taken by the mobile beacon to cover all the nodes that are deployed in the field. The x-axis denotes range in meter and y-axis denotes the path length in meter. The mobile beacon that are used in the field starts at time 1.0s and stops at 50.0s and travels along the tree based path to reach the destination which is at the top of the tree. In existing trajectories, the path

5. length decreases as the range increases. In particular, when communication range of mobile anchor is 40 m the path length of proposed is 400m while the path length of SCAN is 450 m. Hence from the graph, the path length of tree climbing has better performance than existing trajectories such as SPIRAL, SCAN, DOUBLE

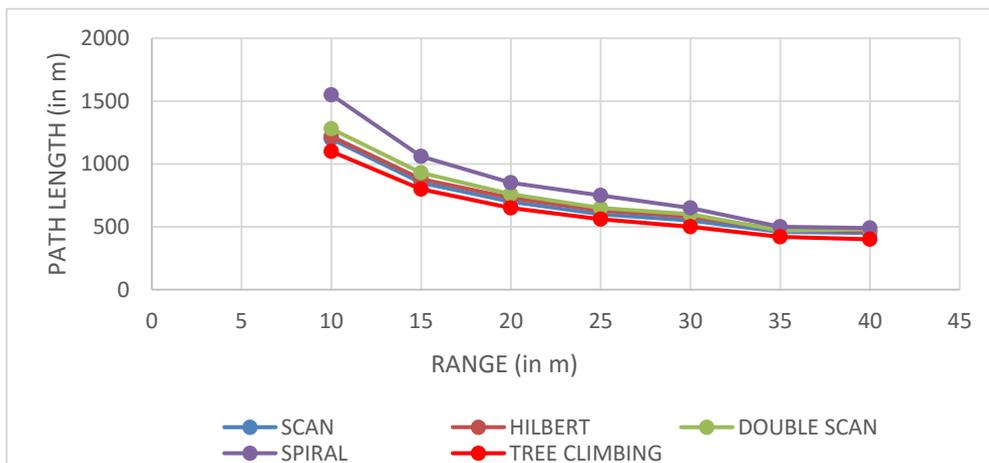

SCAN and HILBERT.

Figure 2: Path length vs Range

6. Conclusions and Future Enhancements

The dynamic tree climbing trajectory for a mobile beacon in wireless sensor network was discussed. The proposed Tree Climbing technique uses MSMA* algorithm for mobile beacon path planning. This technique ensures the best path of mobile beacon and it is also appropriate trajectory to localize the nodes in the deployed area. In future, it is suggested that the Tree Climbing path of MB can also incorporate some other optimization technique to enhance the trajectory and localization of all sensor nodes in deployed area can be performed using any other localization techniques.

References

- [1] M. Sichitiu and V. Ramadurai, "Localization of wireless sensor networks with a mobile beacon," in Proc. IEEE International Conference Mobile on Ad-Hoc Sensor Systems, pp. 174–183, October 2004.
- [2] R. Huang and G. Zaruba, "Static path planning for mobile beacons to localize sensor networks," in Proc. 5th Annual IEEE International Conference Pervasive .Computer Communication Workshops, pp. 323–330, Mar. 2007
- [3] G. Mao, B. Fidan, and B. D. O. Anderson, "Wireless sensor network localization techniques," Computer Networks, vol. 51, no. 10, pp. 2529–2553, Jul. 2007.
- [4] D. Koutsonikolas, S. M. Das, and Y. C. Hu, "Path planning of mobile landmarks for localization in wireless sensor networks," Computer Communication, vol. 30, no. 13, pp. 2577–2592, September 2007.
- [5] H. Li, J. Wang, X. Li, and H. Ma, "Real-time path planning of mobile anchor node in localization for wireless sensor networks," in Proc. International Conference on Information and Automation ICIA, pp. 384–389, June 2008.
- [6] Z. Hu, D. Gu, Z. Song, and H. Li, "Localization in wireless sensor networks using a mobile anchor node," in Proc. IEEE/ASME International Conference on Advanced Intelligent Mechatronics, pp. 602–607, July 2008.
- [7] Z. Guo et al., "Perpendicular intersection: Locating wireless sensors with mobile beacon," IEEE Transactions on Vehicular Technology, vol. 59, no. 7, pp. 3501–3509, Sep. 2010.
- [8] C.H. Ou and W.-L. He, "Path planning algorithm for mobile anchor-based localization in wireless sensor networks," IEEE Sensors Journal, vol. 13, no. 2, pp. 466–475, Feb. 2013.